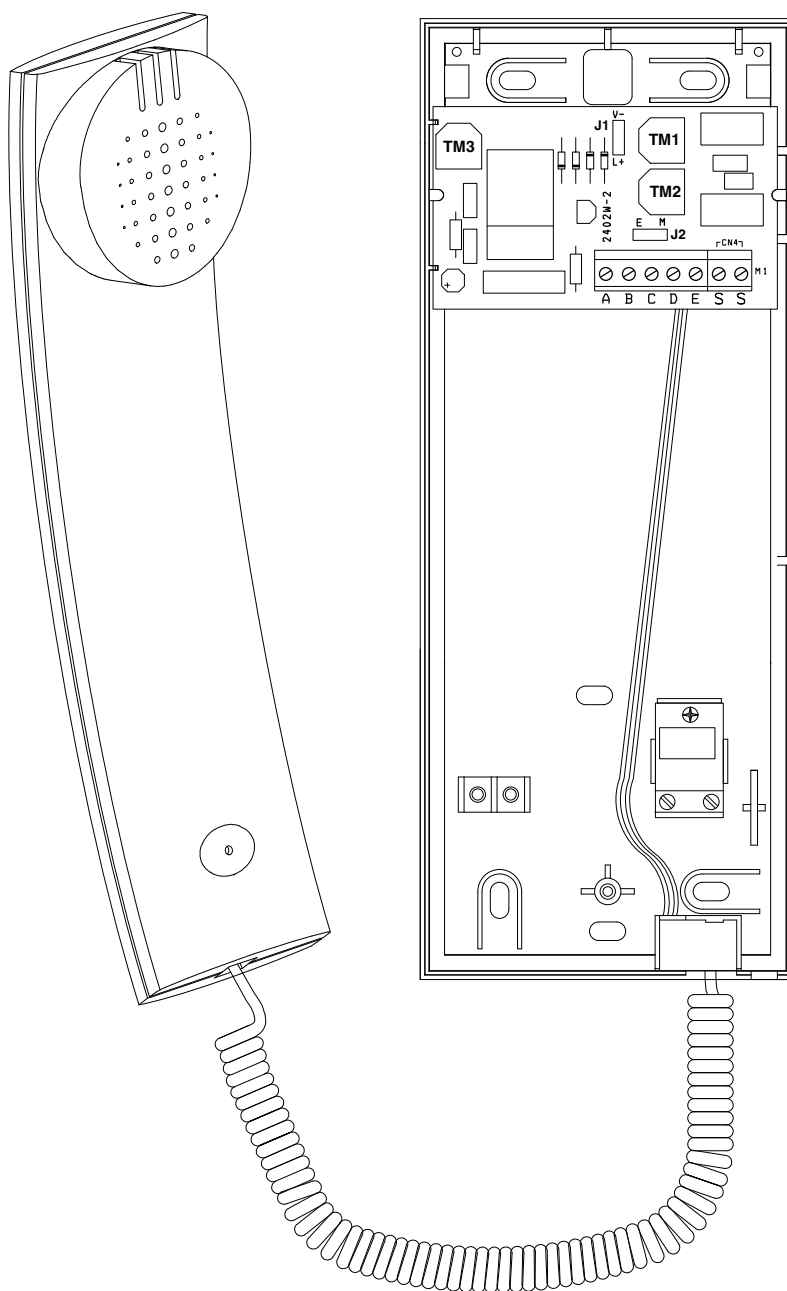


**REGOLAZIONI E SEGNALI****CONTROLS & SIGNALS**

TM1	Trimmer di regolazione corrente microfono
TM2	Trimmer di regolazione volume altoparlante
TM3	Trimmer di regolazione volume microfono
J2	Regolazione tipo di chiamata (E= Nota elettronica, M= Buzzer)
S, S	Contatti Puliti pulsante di servizio (collegati internamente quando il pulsante è premuto).
A	Uscita di tipo attivo basso segnale comando apri-porta (mentre il pulsante "chiave" è premuto il morsetto è internamente collegato alla massa presente sul morsetto "C").
B	Uscita fonia (dal microfono della cornetta).
C	Ingresso segnale di massa.
D	Ingresso segnale di chiamata: con J2 in posizione E bisogna applicare una nota elettronica con J2 in posizione M bisogna applicare un corrente alternata.
E	Ingresso fonia (verso l'altoparlante della cornetta).

TM1	Microphone current trimmer
TM2	Loudspeaker volume trimmer
TM3	Microphone volume trimmer
J2	Call type selector (E = Electronic call tone, M = Buzzer call)
S, S	Service button dry contacts (internally connected while the button is pressed).
A	Active low output for door-open command signal (while the "key" button is pressed it is internally connected to ground on terminal "C").
B	Speech output (from the microphone in the handset).
C	Ground input.
D	Call tone signal input: when J2 = E the signal must be an electronic call tone when J2 = M the signal must be an alternate current.
E	Speech input (toward the handset loudspeaker).

TABELLA DI CONVERSIONE
CONVERSION TABLE

VIDEX - Art.PH410	A	B	C	D	E	J2
ACET	5	10	2	9	7	M
AMPER	D	A	C	E	B	M
ATEA	2	4	3	5	1	M
AUTA	10	3	4	12	7	M
AUTA TF92	10	3	4	12	7	E
AUTELCO	P ₅	a	1	2	b	M
BELL SYSTEM TELEPHONE	Z	R	O	I	T	M
BITRON	9	2	6	C ₇	1	E
BOGEN	T	1	3	6	2	M
BPT	9	-	5	7	8	E
BPT	2	1	4	3	5	M
CENTRAMATIC	4	2	1	5	3	M
CITESA	1	4	C	B	3	M
CITVOX	5	10	9	T	7	M
COFREL (LT TERRANEO)	T ₁	1	3	6	2	M
COFREL (LT TERRANEO)	6	4	1	5	3	E
COFREL 600 (LT TERRANEO)	T	1	3	6	2	M
COFREL 603 (LT TERRANEO)	T	1	3	6	2	M
COMELIT VOX ART. 2100	P ₁	3	4	1	2	M
COMELIT VOX ART. 2101	P ₁	3	4	S	2	E
COMELIT VOX ART. 2102	P ₁	3	4	1	2	M
COMELIT VOX ART. 2103	P ₁	3	4	1	2	M
COMELIT VOX ART. 2104	P ₁	3	4	S	2	E
COMELIT CIAO ART. 2300	P ₁	3	4	S	2	E
COMELIT CIAO ART. 2301	P ₁	3	4	S	2	E
COMELIT CIAO ART. 2302	P ₁	3	4	S	2	E
COMELIT CIAO ART. 2304	P ₁	3	4	1	2	M
COMELIT OKAY ART. 2402W	P ₁	3	4	S	2	E
COMELIT OKAY ART. 2404W	P ₁	3	4	S	2	E
COMELIT OKAY ART. 2405W	P ₁	3	4	S	2	E
ELBEX		MIC	LOW	+	SPEC	M
ELVOX	2	6	9	+	4	M
ELVOX	7	2	4	6	1	M
ELVOX 6200	S	2	3	6E	1	E
ENTRA 97	1	2	3	5	6	M
ENTRYPHONE	3	P	F,B,G	4	L	M
ERICSSON DEPN 40101	5	3	2	1	4	M
ERICSSON DEPN 60121	3	5	1	4	7	M
FARFISA	5	1	3	6	2	M

VIDEX - Art.PH410	A	B	C	D	E	J2
FERMAX Gondola	4	1	3	V/5	2	M
FERMAX Rekto TF-4	P	A	C	E	B	M
FERMAX 2044,20440,21100	1	2	3	4	6	E
FRINGE	2	3	1	4	6	M/E
GAME	P	2	3	Z	1	M
GIRO	2	3	1	4	6	M
GOLMAR	X	M	A	N	S	M/E
GOLMAR	C ₂	5	3	7	10	E
GOLMAR	11	5	3	12	4	M
GOLMAR T-600	T	1	3	6	2	M
GOLMAR T810B	P ₁	5	3	7	10	M
GOLMAR T -2800	4	5	3	7	10	M
LT TERRANEO (COFREL)	T ₁	1	3	6	2	M
LT TERRANEO (COFREL)	6	4	1	5	3	E
LT TERRANEO (COFREL) 600	T	1	3	6	2	M
LT TERRANEO (COFREL) 603	T	1	3	6	2	M
MM DI MARCHESI	1	3	2	5	4	M
OSTELVI	9	2	6	7	1	M
PORMAT	4	3	2	v	1	M
RIPOLLES	3	1	8	4	2	M
SAFNAT	4	1	2	v	3	M
SEITI	5	1	3	6	2	M
SIEDLE HT611-01	I	2	9/C	7	11	M
SPRINT	/	1	3	6	2	M
TAGRA	8	2	6	4	1	M
TEGUI GL	3	4	2	1	5	M
TEGUI HORIZON	3	4	2	1	5	M/E
TELEVES	4	2	3	T	1	M
TESLA DDZ 85	1	2	3	4	6	M
TESLA DDZ 93	Z	2	3	4	6	M
TUNE	8	2	6	4	1	M
URMET	8	2	11	7	1	M
URMET	9	2	6	7	1	M
URMET DOMUS 1131	9	2	10	4	1	M
URMET DOMUS 1130	5	1	3	4	2	M
VIDEX	5	1	3	4	2	E
VIDEX	5	1	7	6	2	M
YUS PHONE	EL	T	-	B/PT	R	M



Factory - Office (All Countries Support)
 VIDEX ELECTRONICS S.p.A. Via del lavoro,1 63020 MONTEGIBERTO (AP) - ITALY
 Phone: (+39) 0734 - 631669 Fax: (+39) 0734 - 632475 www.videx.it e-mail: info@videx.it
 Northern UK Office (Only UK Support)
 VIDEX LTD Unit 5-7 Chillingham Industrial Estate Chapman Street NEWCASTLE UPON TYNE Ne6 2XX
 Phone: 0191 2243174 Fax: 0191 - 2241559 www.videx-security.com